

A



B

C

D

E

F

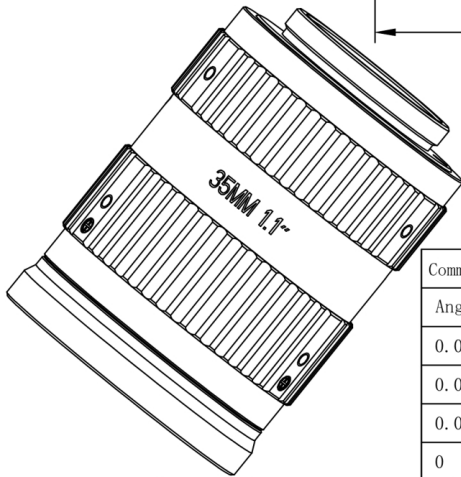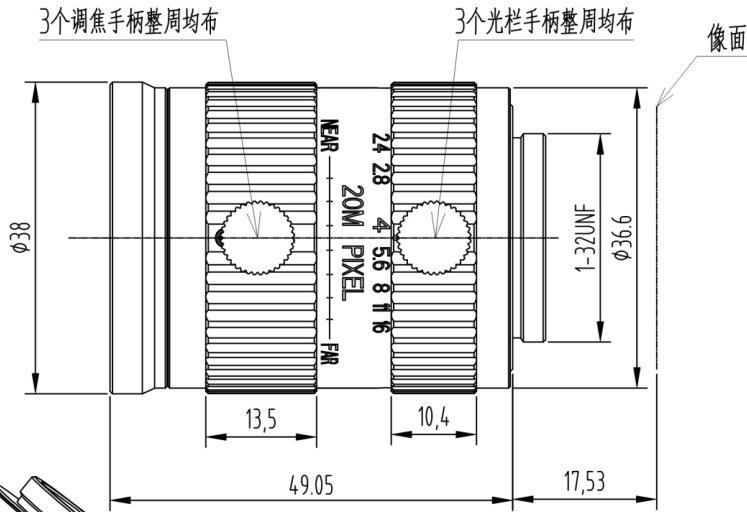

外观标准	60—40	200	0.191X	73.636	55.227
WORKING TEPMERATRU	—40℃~80℃	150	0.262X	53.887	40.415
STORAGE TEPMERATRU	—40℃~85℃	100	0.376X	37.536	28.152

1.1" F2.4/35MM /20MEGA/C MOUNT				
FOCAL LENGTH		f=35MM		
F. NO		F=1:2.4--16		
FOCUS DISTANCE		0.1M		
FLANGE BACK		17.526MM IN AIR		
BACK FOCUS		22.2		
FILTER SCREW SIZE		M35.5*P0.5		
MOUNT		C		
REL. ILLUMINATION		≥70%		
Front/Rear Effective Dia		FrontΦ21.5 Rear Φ17.2		
FIELD OF VIEW	SENSOR	1.1"	1"	2/3"
	D	26.3°	24.4°	16.9°
	H	21.5°	19.6°	13.6°
	V	16.3°	14.8°	10.2°
TV DISTORTION		<0.1%	<0.05%	<0.05%

WORKING DISTANCE	OPTICAL MAGNIFICATION	1.1" FIELD OF VIEW	
		H	V
MM			
5000	0.007X	2079.072	1559.304
2000	0.017X	824.332	618.249
1000	0.035X	406.235	304.676
900	0.039X	364.451	273.338
800	0.044X	322.678	242.009
700	0.05X	280.924	210.693
600	0.059X	239.197	179.398
500	0.071X	197.519	148.139
400	0.090X	155.928	116.946
350	0.104X	135.193	101.395
300	0.123X	114.527	85.896
250	0.150X	93.978	70.483
200	0.191X	73.636	55.227
150	0.262X	53.887	40.415
100	0.376X	37.536	28.152

Common Tolerance		①				Material:	
Angle	±0.5°	③				3RD_ANGLE_PROJN	
		②					
0.000	±0.01	①				Model:	
0.00	±0.03	Rev	Description		Name	Date	35MM-1.1"-20M-C MOUNT
		Design	Examine	Checked	Approved		
0.0	±0.05					Unit	mm
0	±0.1					Scale	2:1
						Ver	00
						Date	2018.09.18
						Part Name:	
						Dwg No:	

A

B

C

D

E

F