
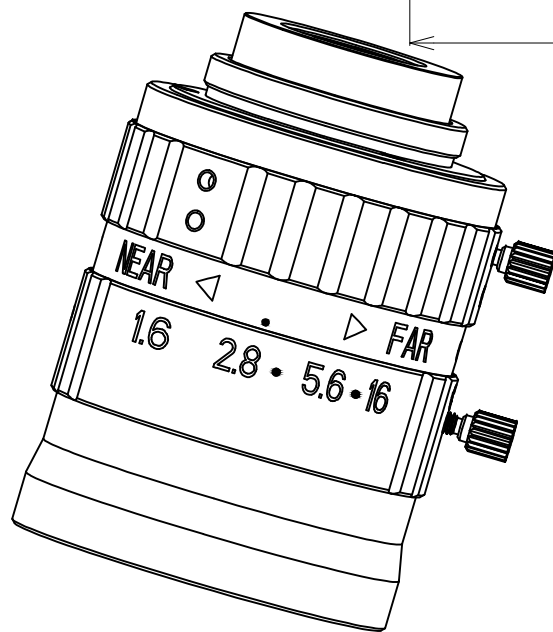


RoHS HF REACH

调焦固定螺丝（整周3个）

光栏调节固定螺丝（整周2个）

像面

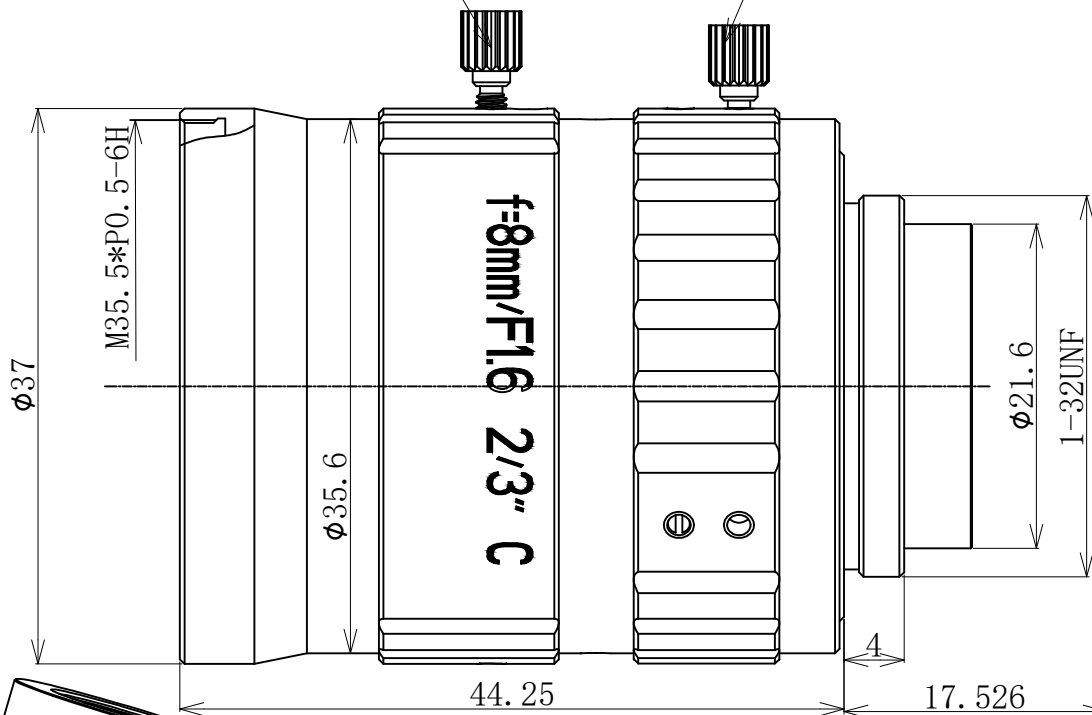

2/3" F1.6/8MM /5MEGA/C MOUNT

FOCAL LENGTH	f=8MM		
F.NO	F=1:1.6--16		
FOCUS DISTANCE	0.1M--1.5M		
FLANGE BACK	17.526MM IN AIR		
BACK FOCUS	9MM IN AIR		
FILTER SCREW SIZE	M35.5*P0.5		
MOUNT	C		
REL. ILLUMINATION	≥70%		
CHIEF RAY ANGLE	<8°		

FIELD OF VIEW	SENSOR	2/3"	1/2"
	D	68°	52.6°
	H	57.1°	43°
	V	44.3°	32.8°


TV DISTORTION	<0.3%		<0.3%
---------------	-------	--	-------

WORKING DISTANCE	OPTICAL MAGNIFICATION	2/3" FIELD OF VIEW	
MM		H	V

900	0.009	982.06	736.54
800	0.01	875.6	656.7
700	0.011	769.14	576.85
650	0.012	715.9	536.93
600	0.013	662.67	497
550	0.014	609.42	457.07
500	0.016	556.18	417.13
450	0.018	502.92	337.19
400	0.02	449.66	337.24
350	0.022	396.38	297.28
300	0.026	343.08	257.31
250	0.03	289.75	217.31
200	0.037	236.37	177.28
150	0.048	182.9	137.18
100	0.069	129.23	96.922

外观标准	60--40
WORKING TEMPERATURE	-40℃~80℃
STORAGE TEMPERATURE	-40℃~85℃

Common Tolerance		④				
		③				
Angle	±0.5°	②				
0.000	±0.01	①				
0.00	±0.03	Rev	Description	Name	Date	
0.0	±0.05		Design	Examine	Checked	Approved
0	±0.1					

Material:		
/		
3RD_ANGLE_PROJN		Model:
		8MM-2/3-5M-C MOUNT
Unit	mm	Part Name:
Scale	2:1	
Ver	00	Dwg No:
Date	2018.03.01	