
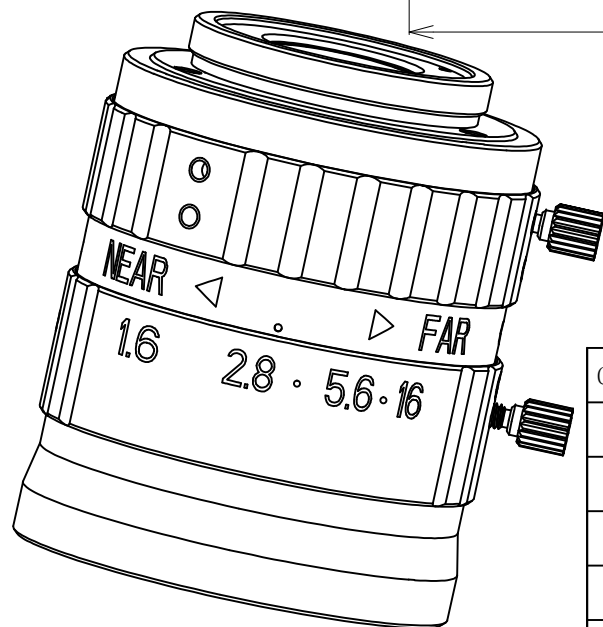
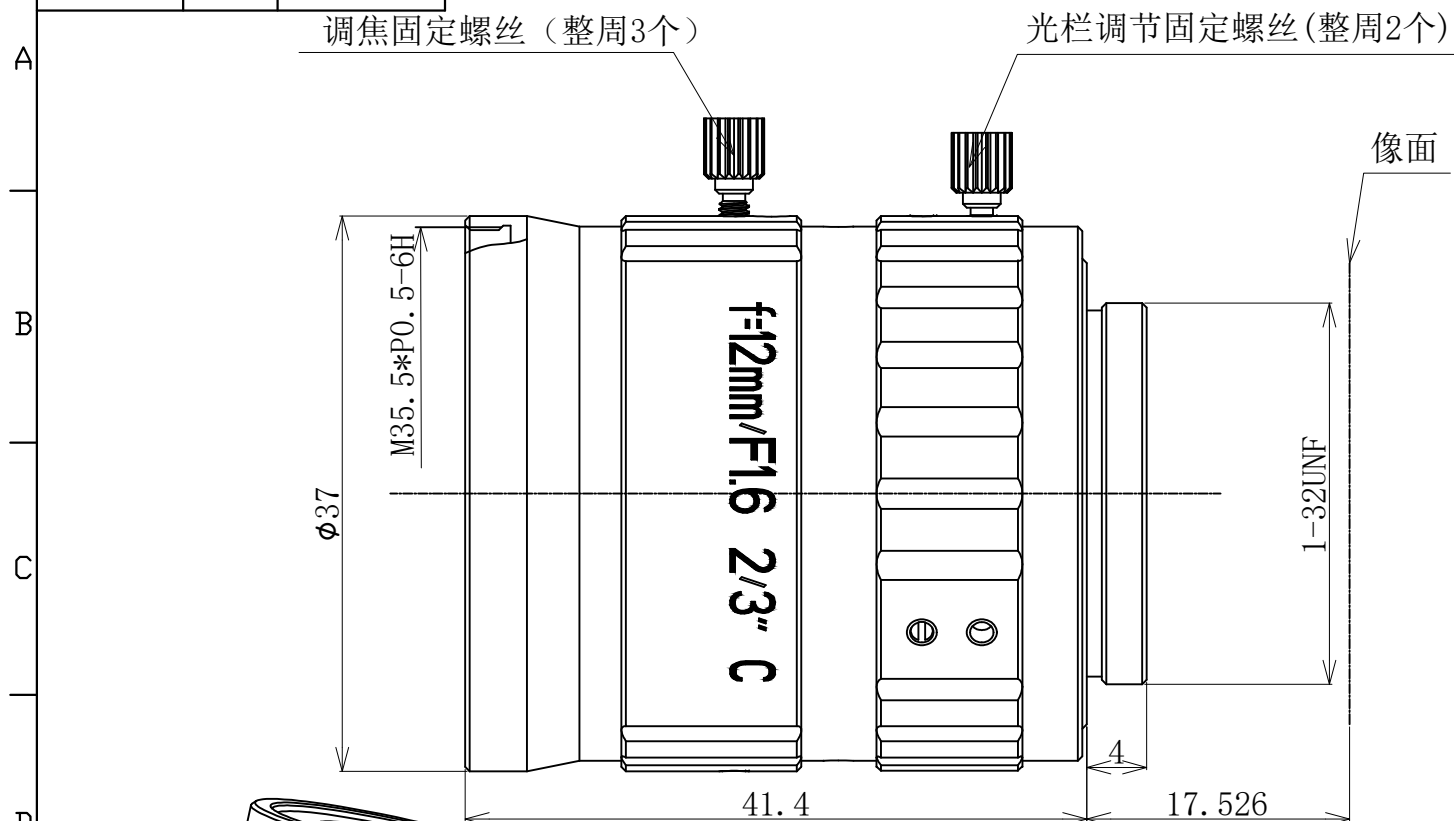




2/3" F1.6/12MM /5MEGA/C MOUNT			
FOCAL LENGTH		f=12MM	
F.NO		F=1:1.6--16	
FOCUS DISTANCE		0.1M--1.5M	
FLANGE BACK		17.526MM IN AIR	
BACK FOCUS		14.04MM IN AIR	
FILTER SCREW SIZE		M35.5*P0.5	
MOUNT		C	
REL. ILLUMINATION		≥70%	
CHIEF RAY ANGLE		<8°	
FIELD OF VIEW	SENSOR	2/3"	1/2"
	D	48.1°	36°
	H	39.4°	29.2°
	V	30.1°	22.1°
TV DISTORTION		<0.1%	

WORKING DISTANCE	OPTICAL MAGNIFICATION	2/3" FIELD OF VIEW	
MM		H	V
900	0.013	655.55	491.66
800	0.015	584.13	438.09
700	0.017	512.7	384.52
650	0.019	476.98	357.74
600	0.02	441.26	330.95
550	0.022	405.54	304.16
500	0.024	369.82	277.36
450	0.026	334.08	250.56
400	0.03	298.35	223.76
350	0.034	262.6	196.95
300	0.039	226.84	170.13
250	0.046	191.06	143.3
200	0.057	155.25	116.44
150	0.074	119.38	89.535
100	0.106	89.393	62.545

外观标准	60--40	200	0.057	155.25	116.44
WORKING TEPMERATRUE	-40℃~80℃	150	0.074	119.38	89.535
STORAGE TEPMERATRUE	-40℃~85℃	100	0.106	89.393	62.545

Common Tolerance		④				Material:			
		③				/			
		②							
		①				3RD_ANGLE_PROJ	Model:		
Angle	±0.5°						12MM-2/3-5M-C MOUNT		
0.000	±0.01	Rev	Description		Name	Date			
0.00	±0.03		Design	Examine	Checked	Approved	Unit	mm	Part Name:
0.0	±0.05						Scale	2:1	
0	±0.1						Ver	00	Dwg No:
							Date	2018.03.01	