
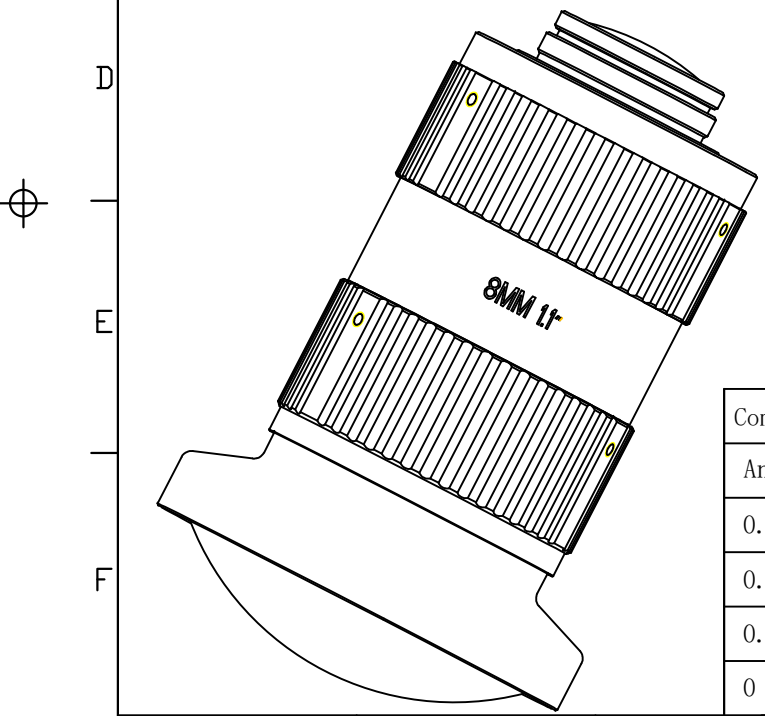


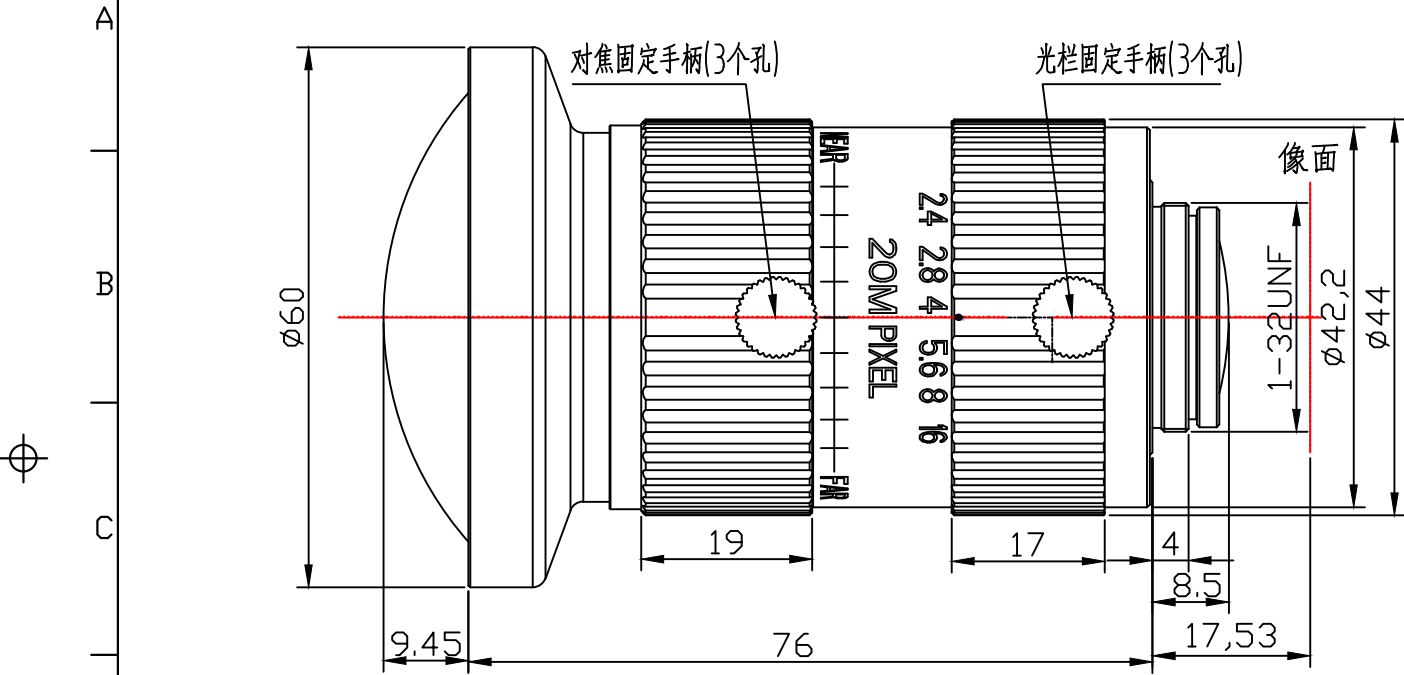

1.1" F2.4/8.5MM /20MEGA/C MOUNT	
FOCAL LENGTH	f=8.5MM
F.NO	F=1:2.4--16
FOCUS DISTANCE	0.1M---无穷远
FLANGE BACK	17.526MM IN AIR
BACK FOCUS	9MM
FILTER SCREW SIZE	无
MOUNT	C
REL. ILLUMINATION	≥65%
Front/Rear Effective Dia	Frontφ49.5 Rear φ20.4
FIELD OF VIEW	SENSOR 1.1" 1" 2/3"
	D 90.3° 85.3° 65.1°
	H 78.4° 73.2° 54.1°
	V 63.2° 58.2° 41.8°
TV DISTORTION	<1% <0.5% <0.9%
WORKING DISTANCE	OPTICAL MAGNIFICATION 1.1" FIELD OF VIEW
MM	H V
5000	0.002X 8121.447 6091.085
2000	0.004X 3289.3 2466.983
1000	0.008X 1678.5 1258.9
900	0.009X 1517.467 1138.1
800	0.01X 1356.4 1017.285
700	0.012X 1195.29 896.47
600	0.014X 1034.2 775.64
500	0.016X 873.08 654.8
400	0.020X 711.95 533.91
350	0.022X 631.37 473.527
300	0.026X 550.77 413.083
250	0.03X 470.162 352.622
200	0.036X 389.508 292.131
150	0.046X 308.778 231.58
100	0.062X 227.87 170.9

外观标准	60--40
WORKING TEMPERATURE	-40℃~80℃
STORAGE TEMPERATURE	-40℃~85℃

Common Tolerance		④				
Angle		③				
±0.5°		②				
0.000		①				
±0.01		Rev	Description	Name	Date	
0.00			Design	Examine	Checked	Approved
±0.03						
0.0						
±0.05						
0.0						
±0.1						
0						

Material:			
/			
3RD_ANGLE_PROJ		Model:	
		8.5MM-1.1"-20M-C MOUNT	
Unit mm		Part Name:	
Scale 2:1			
Ver 00		Dwg No:	
Date 2018.10.10			