


RoHS HF REACH

2/3" F1.6/25MM /5MEGA/C MOUNT	
FOCAL LENGTH	f=25MM
F.NO	F=1:1.6--16
FOCUS DISTANCE	0.1M--1.5M
FLANGE BACK	17.526MM IN AIR
BACK FOCUS	10.45MM IN AIR
FILTER SCREW SIZE	M30.5*P0.5
MOUNT	C
REL. ILLUMINATION	≥76%
CHIEF RAY ANGLE	<7°

调焦固定螺丝（整周2个）


光栏调节固定螺丝(整周2个)

像面

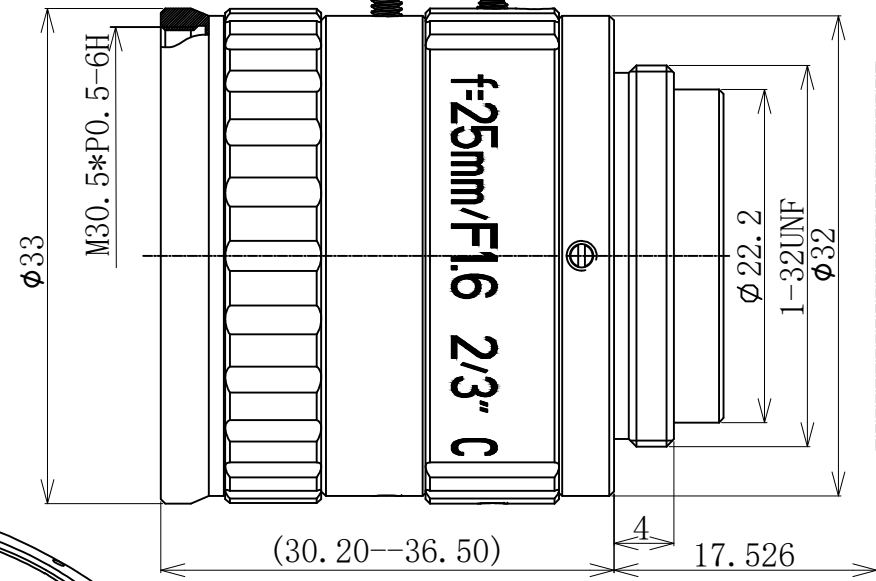

FIELD OF VIEW	SENSOR	2/3"	1/2"
	D	23.3°	17.1°
	H	18.7°	13.7°
	V	14.1°	10.3°
TV DISTORTION	<0.1%		<0.05%

WORKING DISTANCE	OPTICAL MAGNIFICATION	2/3" FIELD OF VIEW	
		H	V
900	0.028	312.47	234.35
800	0.032	277.92	208.44
700	0.036	243.37	182.53
650	0.039	226.09	169.57
600	0.042	208.82	156.61
550	0.046	191.54	143.66
500	0.051	174.26	130.7
450	0.057	156.98	117.73
400	0.064	139.69	104.77
350	0.073	122.41	91.805
300	0.085	105.11	78.835
250	0.102	87.811	65.859
200	0.127	70.496	52.872
150	0.168	53.155	39.866
100	0.25	35.758	26.819

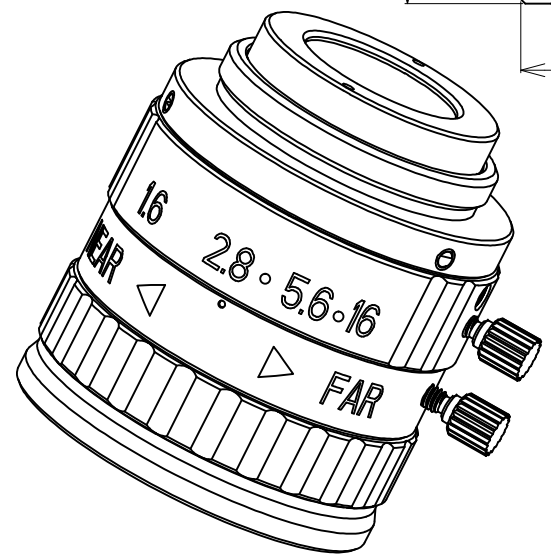

外观标准	60--40
WORKING TEMPERATURE	-40℃~80℃
STORAGE TEMPERATURE	-40℃~85℃

Common Tolerance		④			
Angle		±0.5°	③		
0.000		±0.01	②		
0.00		±0.03	①		
0.0		±0.05	Rev	Description	Name Date
0		±0.1		Design	Examine
				Checked	Approved

Material:			
3RD_ANGLE_PROJ		Model:	
		25MM-2/3-5M-C MOUNT	
Unit		Part Name:	
Scale			
Ver		Dwg No:	
Date			